



STAYTIGHT FENCE ENDS

Australia's quickest, easiest, and most adjustable range of fence end kits.

Our selection ranges from our patented hand drivable Drive-Tight posts to machine-driveable or concrete-in kits.

All bolt-on, with no drilling or welding required. It's quick and easy to install and fully adjustable at anytime.

All components are either hot dip galvanised or stainless steel. They will last the test of time.

Do it once. Do it right.

Farm Fences. Sorted.

STAYTIGHT



DRIVE-TIGHT® (HAND-DRIVABLE) END ASSEMBLY KIT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATDT	100NB	2100mm	40NB	3250mm	1200mm	 9 348326 004694	10
RSATHDDT	"	"	50NB	"	1200mm	 9 348326 004700	10

Includes: Post, Cap, Anchor Lugs, Stay, Post & Stay Connector, Footplate, & Tension Cable

DRIVE-TIGHT® (HAND-DRIVABLE) END ASSEMBLY KIT - STAINLESS STEEL EYEBOLT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATHDDTSS	100NB	2100mm	50NB	3250mm	1200mm	 9 348326 005820	10

Includes: Post, Cap, Anchor Lugs, Stay, Post & Stay Connector, Footplate, & **Stainless Steel Eyebolt** Tension Cable

DRIVE-TIGHT® (HAND-DRIVABLE) EXCLUSION END ASSEMBLY KIT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATHDDT2400	100NB	2400mm	50NB	3250mm	1200mm - 1500mm	 9 348326 005516	10

Includes: Post, Cap, Anchor Lugs, Stay, Post & Stay Connector, Footplate & Tension Cable

DRIVE-TIGHT® (HAND-DRIVABLE) EXCLUSION END ASSEMBLY KIT - STAINLESS STEEL EYEBOLT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATHDDT2400SS	100NB	2400mm	50NB	3250mm	1200mm - 1500mm	 9 348326 005920	10

Includes: Post, Cap, Anchor Lugs, Stay, Post & Stay Connector, Footplate & **Stainless Steel Eyebolt** Tension Cable



2 LUG-SLOTS


2 lug-SLOT positions.

Install your lugs for a post height of 1200mm or 1500mm.



**8X
MORE GROUND
ANCHORAGE**

$V = 0.43M^3$ $V = 3.4M^3$

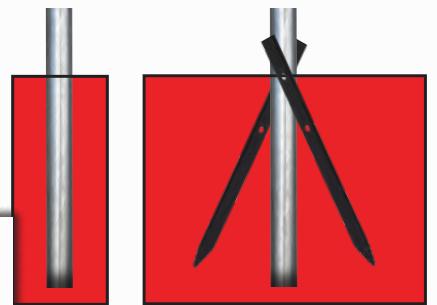

SCAN HERE
TO WATCH
THE VIDEO



STAYTIGHT



ROTECH
RURAL
.COM.AU

DRIVE-TIGHT® (HAND-DRIVABLE) POSTS

CODE	POST	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSPDT100	100NB	2100mm	1200mm	 9 348326 004717	10
RSPDT1002400	"	2400mm	1200mm	 9 348326 005523	10

DRIVE-TIGHT® POST DRIVER

CODE	SUIT	LENGTH	WEIGHT	BARCODE	PACK QTY
DTPD	<100NB Round Post	810mm	21kg	 9 348326 004793	1



INSTALL YOUR DRIVETIGHT WITH OUR HAND DRIVER

Using the hand driver, you can install your post in 5 minutes!

And you can get it anywhere with ease, making our DriveTight End Assembly the most versatile solution!



SCAN HERE
TO WATCH
THE VIDEO




DRIVER OPTIONS:



HAND DRIVER



PNEUMATIC DRIVER



HYDRAULIC/PTO DRIVER



POST DRIVER

The DRIVE-TIGHT hand driver measures 810mm and weighs 21kg. It gives you enough weight to drive the post in, without being too heavy.

THE POST

It's a 100NB (114.3 O.D) hot dip galvanised pipe with a 4.5mm wall thickness and is available at 2100mm or 2400mm long. It should be driven in to just above the anchor lugs.

ANCHOR LUGS

Clip in lugs on 45° angles, allow half-length pickets to be driven in. This dramatically increases ground anchorage.

THE PENETRATOR

The pointed end penetrates the ground with ease, meaning faster installs and less wear and tear on equipment.

THE ONLY END ASSEMBLY KITS TO INCLUDE -

1) STAINLESS STEEL TENSION CABLE AND EYE-BOLT

The stainless steel tension assembly makes the Rotech assemblies the most corrosion resistant in Australia!

The superior quality means they are better able to withstand salt-air, have a higher fire resistance and last significantly longer.

Upgrade available in all kits - Add SS to end of code.

2) LOKDOWN LUGS

CREATED IN RESPONSE TO REAL-WORLD TESTING & CUSTOMER FEEDBACK!

Over the past few years we have experienced some severe droughts and major flooding events. We have gained valuable knowledge by observing which fences remained intact and which ones didn't.


That is why we have created the LokDown Lugs!

The LokDown lugs give the post 8x more ground anchorage. This means the Rotech assemblies have significantly more support in the soil and increased resistance. This allows them to withstand much greater force.


Now included in all steel post kits and available separately.




LOKDOWN LUGS



$V = 0.43M^3$ $V = 3.4M^3$

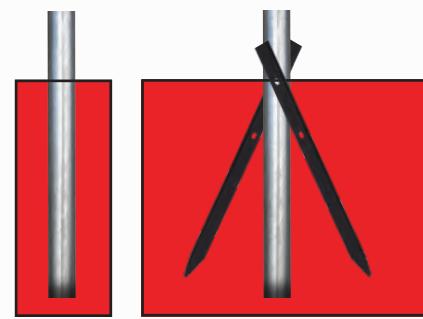

8X
MORE GROUND
ANCHORAGE

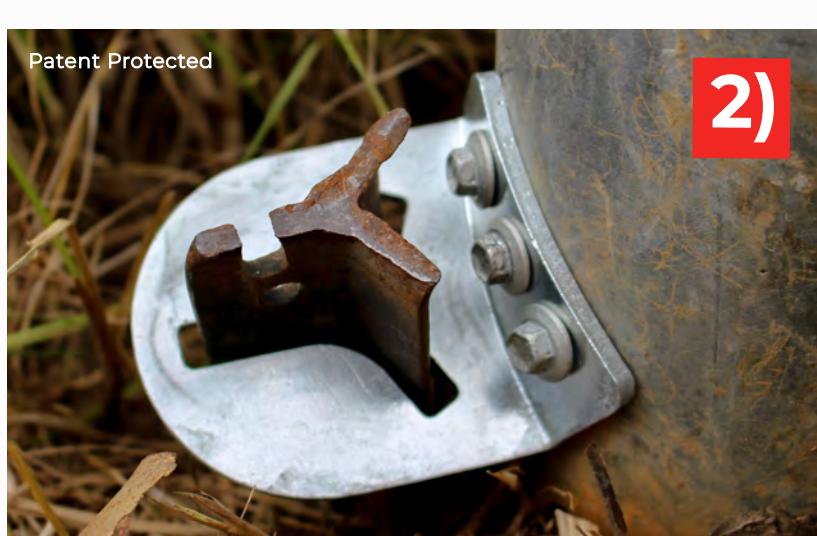

SCAN HERE
TO WATCH
THE VIDEO



STAYTIGHT



ROTECH
RURAL
.COM.AU

DRIVABLE (MACHINE/TRACTOR) ROUND POST END ASSEMBLY KIT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSAT804.0	80NB	2400mm	40NB	3250mm	1200mm	 9 348326 003574	10
RSATHD804.0	"	"	50NB	"	"	 9 348326 004786	10
RSAT4.5	100NB	"	40NB	"	"	 9 348326 003598	10
RSATHD4.5	"	"	50NB	"	"	 9 348326 003611	10

Includes: Post, Cap, Stay, Post & Stay Connector, Footplate, **LokDown Lugs** & Tension Cable

DRIVABLE (MACHINE/TRACTOR) ROUND POST END ASSEMBLY KIT - STAINLESS STEEL

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSAT4.5SS	100NB	2400mm	40NB	3250mm	1200mm	 9 348326 006292	10
RSATHD4.5SS	"	"	50NB	"	"	 9 348326 005806	10

Includes: Post, Cap, Stay, Post & Stay Connector, Footplate, **LokDown Lugs** & **Stainless Steel Eyebolt** Tension Cable

DRIVABLE (MACHINE/TRACTOR) ROUND POST EXCLUSION KIT

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATHD4.5 3.25M	100NB	3250mm	50NB	3250mm	2000mm	 9 348326 005516	10

Includes: Post, Cap, Stay, Post & Stay Connector, Footplate, **LokDown Lugs** & Tension Cable

DRIVABLE (MACHINE/TRACTOR) ROUND POST EXCLUSION KIT - STAINLESS STEEL

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSATHD4.5 3.25MSS	100NB	3250mm	50NB	3250mm	2000mm	 9 348326 005929	10

Includes: Post, Cap, Stay, Post & Stay Connector, Footplate, **LokDown Lugs** & **Stainless Steel Eyebolt** Tension Cable

CONCRETE-IN (NON-DRIVABLE) ROUND POST FENCE END KITS

CODE	POST Ø	LENGTH	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSAT3.2	100NB	2100mm	40NB	3250mm	1200mm	 9 348326 003581	10
RSATHD3.2	"	"	50NB	"	"	 9 348326 003604	10

Includes: Post, Cap, Stay, Post & Stay Connector, Footplate, **LokDown Lugs** & Tension Cable

STAY TIGHT®

HD SOCKET
5X
FASTER



SCAN HERE
TO WATCH
THE VIDEO



STAYTIGHT



DRIVEABLE POSTS

CODE	POST	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSP804.0	80NB	2400mm	1200mm	 9 348326 003635	10
RSP1004.5	100NB	2400mm	1200mm	 9 348326 004076	10
RSP1004.5 3.25M	"	3250mm	2000mm	 9 348326 005851	10

CONCRETE-IN POSTS

CODE	POST	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSP1003.2	100NB	2100mm	1200mm	 9 348326 003642	10

TENSION ASSEMBLY

CODE	FOOT-PLATE (W X L)	POST	EYEBOLT	BARCODE	PACK QTY
TCA	300 x 400mm	<250mm	Hot-Dip Galvanised	 9 348326 003499	10
TCASS	"	"	Stainless Steel	 9 348326 005776	10



Includes: Tension Cable & Footplate

LOKDOWN LUG ANCHORAGE KIT

CODE	BARCODE	PACK QTY
PGFL	 9 348326 005967	10



Includes: 2x LokDown Lugs, 7x Tek Screws

TUBE SOCKET

CODE	LENGTH	NUT	DRIVE	BARCODE	PACK QTY
STS	410mm	19mm (M12)	1/2"	 9 348326 003697	1
STSHD	480mm	"	"	 9 348326 006155	1



MULTI STAY

ADDITIONAL STAY KITS - FOR CORNERS (POST NOT INC.)

CODE	SUITABLE POST Ø	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSK8040	80NB	40NB	3250mm	1200mm-2000mm	 9 348326 005540	10
RSK8050	"	50NB	"	1200mm-2000mm	 9 348326 005547	10
RSK40	100NB	40NB	"	1200mm-2000mm	 9 348326 004175	10
RSK50	"	50NB	"	1200mm-2000mm	 9 348326 004168	10

Includes: Stay, Cap, Post & Stay Connector, Footplate, **LokDown Lugs** & Tension Cable

ADDITIONAL STAY KITS - FOR CORNERS (POST NOT INC.) - STAINLESS STEEL EYEBOLT

CODE	SUITABLE POST Ø	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
RSK40SS	100NB	40NB	3250mm	1200mm-2000mm	 9 348326 006339	10
RSK50SS	"	50NB	"	1200mm-2000mm	 9 348326 005813	10

Includes: Stay, Cap, Post & Stay Connector, Footplate, **LokDown Lugs** & **Stainless Steel Eyebolt** Tension Cable



QUICK & EASY

Our assemblies require,
NO welding and NO drilling

Complete in under 5 minutes
- Tighten the 2 bolts with the StayTight tube spanner and you're done.

100% STEEL - From the post cap down to the footplate!

STAYTIGHT



PINE POST MULTISTAY (<250MM)

CODE	SUITABLE POST Ø	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
PPSK50	<250mm	50NB	3250mm	1200mm - 2000mm	 9 348326 005271	10

Includes: Stay, Stay Connector, Footplate, & **Stainless Steel Eyebolt** Tension Cable

TRADITIONAL PINE POST FENCE ENDS WITH A TWIST!

Installing a traditional pine post fence end is labour intensive and back breaking work. The StayTight timber post system can dramatically reduce the effort, but still give you the traditional look.

- 1) Installing our steel stay is simple—just drill a single 16mm hole, unlike the time-consuming box mitre needed for a pine stay. Then, the capping disc not only finishes the stay neatly but also stops it from pushing through the post. A win-win solution! (pic. 1)
- 2) The stainless steel tension cable drops straight over pine posts up to 250mm. Meaning, drilling through the post is no longer required which adds life to the post by decreasing the chance of rot. (pic. 2)



TIMBER POST MULTISTAY (<550MM)

CODE	SUITABLE POST Ø	STAY Ø	LENGTH	FENCE HEIGHT	BARCODE	PACK QTY
TSK50	<550mm	50NB	3250mm	1200 - 2000mm	 9 348326 003543	10

Includes: Stay, Stay Connector, Footplate, & **Double Ended** Tension Cable



SCAN HERE
TO WATCH
THE VIDEO




MULTI STAY

1)



2)

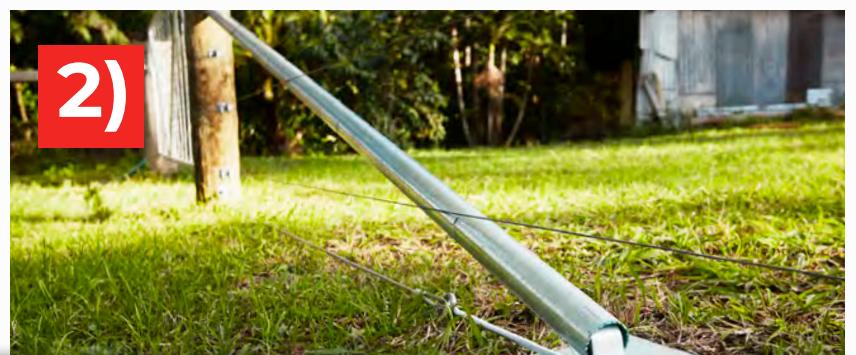

SCAN HERE
TO WATCH
THE VIDEO



Concrete Post?
Use the Pine Post Stay Kit! Drill a 16mm hole.

STAYTIGHT



FITTING KITS (BOLT-ON COMPONENTS. NO PIPE INC.)

CODE	SUITABLE POST Ø	SUITABLE STAY Ø	FENCE HEIGHT	BARCODE	PACK QTY
SSFK8040	80NB	40XL-40M NB	1200mm - 2000mm	 9 348326 003895	5
SSFK8050	"	50XL-50M NB	1200mm - 2000mm	 9 348326 003918	5
SSFK10040	100NB	40XL-40M NB	1200mm - 2000mm	 9 348326 003925	5
SSFK10050	"	50XL-50M NB	1200mm - 2000mm	 9 348326 003949	5
SSFK15050	150NB	50XL-50M NB	1200mm - 2000mm	 9 348326 005500	5

Includes: Cap, Post & Stay Connector, Footplate, **LokDown Lugs** & Tension Cable

FITTING KITS (BOLT-ON COMPONENTS. NO PIPE INC.) - STAINLESS STEEL EYEBOLT

CODE	SUITABLE POST Ø	SUITABLE STAY Ø	FENCE HEIGHT	BARCODE	PACK QTY
SSFK10040SS	100NB	40XL-40M NB	1200mm - 2000mm	 9 348326 006308	5
SSFK10050SS	"	50XL-50M NB	1200mm - 2000mm	 9 348326 005783	5
SSFK15050SS	150NB	"	1200mm - 2000mm	 9 348326 006315	5

Includes: Cap, Post & Stay Connector, Footplate, **LokDown Lugs** & **Stainless Steel Eyebolt** Tension Cable

PINE POST FITTING KITS

CODE	SUITABLE POST Ø	SUITABLE STAY Ø	FENCE HEIGHT	BARCODE	PACK QTY
SSFKPP50	≤250mm	50XL-50M NB	1200mm - 2000mm	 9 348326 004915	5

Includes: Stay Connector, Footplate & **Stainless Steel Eyebolt** Tension Cable

TIMBER POST FITTING KIT

CODE	SUITABLE POST Ø	SUITABLE STAY Ø	FENCE HEIGHT	BARCODE	PACK QTY
SSFKTP50	<550mm	50XL-50M NB	1200mm - 2000mm	 9 348326 005899	5

Includes: Stay Connector, Footplate & **Double-Ended Eyebolt** Tension Cable

**5 KITS
PER
TUB**



**SUITS POSTS
<250MM**




Optional Slipknot - If adding tension cable to an existing fence, or if shortening the cable.

LOKDOWN LUGS




$V = 0.43M^3$



$V = 3.4M^3$

**8X MORE GROUND
ANCHORAGE**

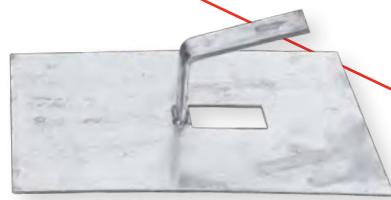

Patent Protected



Stainless Steel Eyebolt Available

LONG NUT

Provides twice the thread grip and allows for easier tightening due to the increased surface area.



**SCAN HERE
TO WATCH
THE VIDEO**



STAYTIGHT



ROTECH
RURAL
.COM.AU

TWIST TIGHT®

POST & STAY CONNECTORS



No Drilling



No Welding



Adjustable



Easy Install



Fast Install



Strong



Anti-Bruise

ADAPT-A FIT TECHNOLOGY - PATENT PROTECTED INNOVATION

The new Adapt-a Fit technology means that our connector tongue can conform to any stay wall. As you insert the connector, depending on the stay wall thickness, the slit will compress to the exact fit. This standardises your operation allowing you to keep your connectors consistent and reliable.



>



>



STRONG

The Twist-Tight post and stay connectors have been designed specifically for the demands of farm fences, not lighter duty applications like security fences.

A high tensile (8.8) M12 bolt secures the tongue and clamp onto the post. A bolt is secure, unlike a pre-drilled hole.

The 6mm thick tongue goes 125mm down inside the stay, this significantly increases the strength and effectiveness.


ADJUSTABLE

The Twist-Tight clamp allows for adjustment at any time, unlike alternative options, where the stay has been welded or inserted into pre-drilled holes.

HIGH TENSILE BOLT

High tensile 8.8-grade nut and bolt for strength and to prevent thread stripping.

Patent Protected

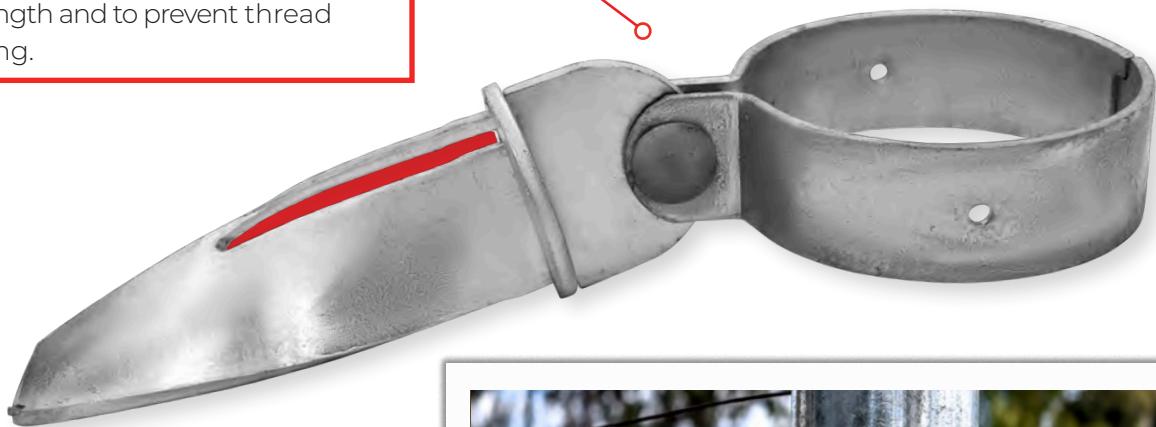

TWIST-TIGHT POST & STAY CONNECTORS

CODE	POST Ø	STAY Ø	REQUIRED WALL THICKNESS	BARCODE	PACK QTY
PSC8040	80NB	40XL-40M NB	Extra Light Light Medium	 9 348326 003956	20
PSC8050	"	50XL-50M NB	Extra Light Light Medium	 9 348326 003970	20
PSC10040	100NB	40XL-40M NB	Extra Light Light Medium	 9 348326 003987	20
PSC10050	"	50XL-50M NB	Extra Light Light Medium	 9 348326 004007	20
PSC15040	150NB	40XL-40M NB	Extra Light Light Medium	 9 348326 005479	10
PSC15050	"	50XL-50M NB	Extra Light Light Medium	 9 348326 005493	10




WHAT IS NOMINAL BORE (NB)?

The bore is the hollow section of the pipe. Nominal refers to the approximate measurement of the bore.

There are regulations that govern the outside diameter (O.D) of pipe. So, to allow for different wall thicknesses the inside diameter (I.D) of the pipe has to vary. The outside doesn't change, the inside does...nominal bore.

Pipe was originally measured in inches. 100NB pipe works out to be exactly 4.5 inches (4.5(inches) x 25.4(mm/inch) = 114.3mm). That's why the O.D can't be simple number like 100mm.

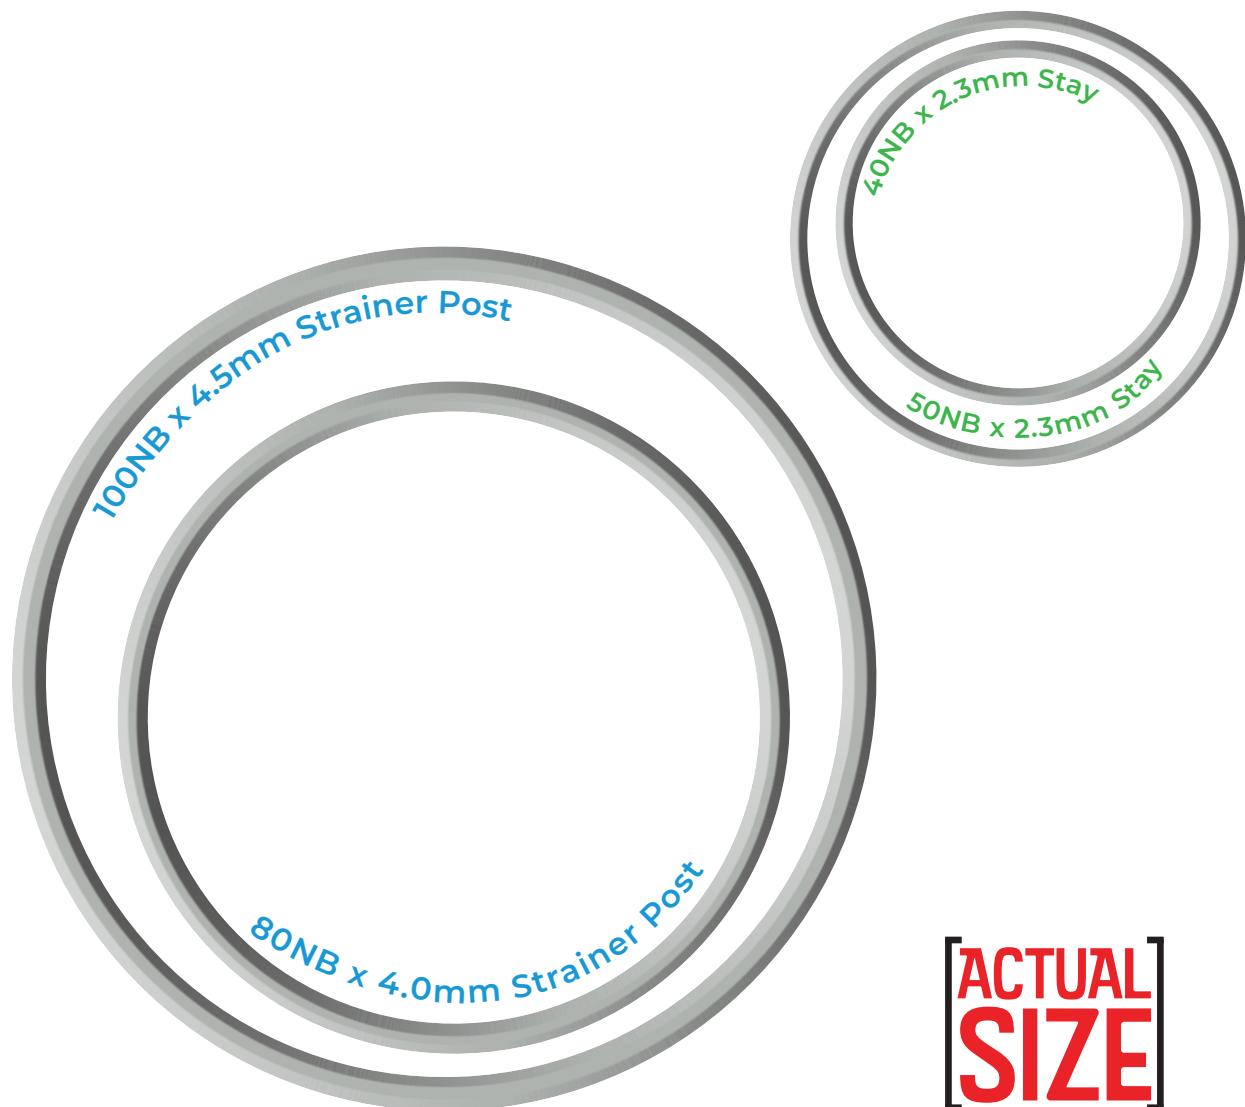

PIPE DIAMETER CHART

NOMINAL BORE (NB)	SECTION	WALL THICKNESS (MM)	OUTSIDE DIAMETER (O.D)
20NB	Extra Light	2.0	27mm
	Light	2.3	
	Medium	2.6	
	Heavy	3.2	
25NB	Extra Light	2.0	34mm
	Light	2.6	
	Medium	3.2	
	Heavy	4.0	
32NB	Extra Light	2.0	42mm
	Light	2.6	
	Medium	3.2	
	Heavy	4.0	
40NB	Extra Light	2.3	48mm
	Light	2.9	
	Medium	3.2	
	Heavy	4.0	
50NB	Extra Light	2.3	60mm
	Light	2.9	
	Medium	3.6	
	Heavy	4.5	
65NB	Extra Light	2.3	76mm
	Light	3.2	
	Medium	3.6	
	Heavy	4.5	
80NB	Extra Light	2.6	89mm
	Light	3.2	
	Medium	4.0	
	Heavy	5.0	
90NB	Extra Light	2.6	102mm
	Light	3.2	
	Medium	4.0	
	Heavy	5.0	
100NB	Extra Light	3.2	114mm
	Light	3.6	
	Medium	4.5	
	Heavy	5.4	
125NB	Extra Light	3.0	140mm
	Light	3.5	
	Medium	5.0	
	Heavy	5.4	
150NB	Extra Light	3.0	165mm
	Light	3.5	
	Medium	5.0	
	Heavy	5.4	